

PUBLICATION NUMBER : 59042020
PUBLICATION DATE : 08-03-84


APPLICATION DATE : 02-09-82
APPLICATION NUMBER : 57151793

APPLICANT : KANAGAWAKEN;

INVENTOR : YOKOGAWA TETSUYA;

INT.CL. : B01D 53/34 B05C 15/00

TITLE : TREATMENT OF WASTE GAS
GENERATED IN PAINTING WORK AND
DEVICE FOR SAID METHOD

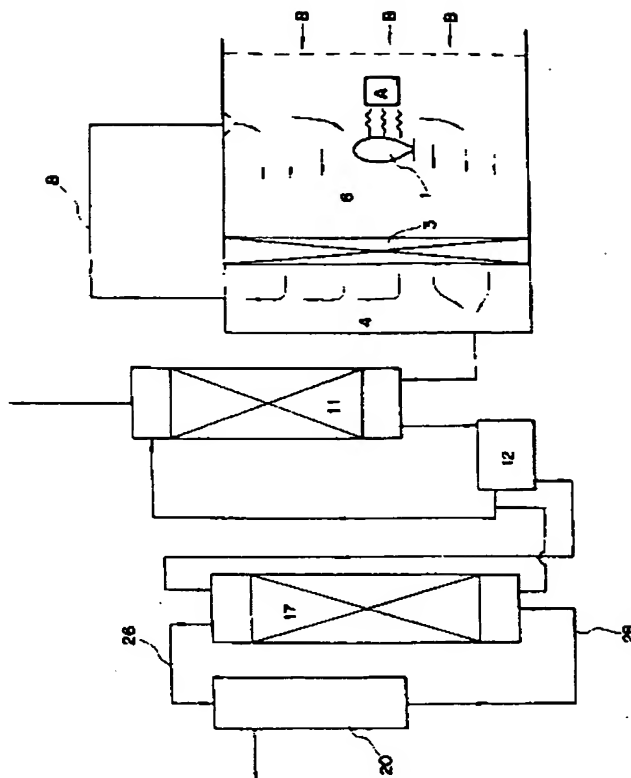

ABSTRACT : **PURPOSE:** To recover easily the volatile component of the paint solvent in the gas past the paint particle capturing member by capturing said volatile component by a monoetherified material of a copolymer of polyethylene glycol and polypropylene glycol or the like.

CONSTITUTION: The paint particles in the waste gas of paint generated from the painting device A in a painting chamber 6 are captured by a paint particle capturing member 3. Part of the gas past said member is returned to the original place and the rest is transferred to a gas-liquid contact device 11. The gas transferred into the device 11 is brought into gas-liquid contact with a 3-45% aq. soln. of the monoetherified material or monoesterified material of a copolymer of polyethylene glycol and polypropylene glycol to remove volatile components, whereafter the gas is discharged to the outside of the system. The above-described aq. soln. of the volatile component and an org. liquid material which does not incorporate with said soln. are brought into liquid-liquid contact with each other to migrate the volatile components to the latter. The remaining aq. soln. is recirculated to the device 11. The volatile component migrated to the above-described org. liquid material is recovered by a device 20 for recovering the volatile component of the paint solvent.

COPYRIGHT: (C)1984,JPO&Japio